



PRODUCT
CATALOGUE

BEST
SOLUTION
FOR CONSTRUCTION
REQUIREMENT

NEXBONDTM
Build for Tomorrow...





TA-101 Grey Tile Adhesive - Floor Grade

Economical, cement-based tile adhesive ideal for ceramic floor tile installation in interior spaces.

Features: Easy to apply, decent bond strength, slip resistance.

Recommended For: Standard ceramic floor tiles only.

Application: Ceramic floor tiles - Interior

CATEGORY:
C1T

Testing Parameters Table

Packaging Size: 20 & 40 kg. Bag

Product Code	Open Time	Pot life	Adjustability Time	Shear Adhesion (28 days)	Slip Resistance	Coverage (Approx.)	Water Resistance	Flexibility
TA-101	15–20 min	3–4 hrs	15–20 min	≥ 0.5 N/mm ²	≤ 0.5 mm	4–5 m ² per 20 kg	Moderate	Low



TA-202 Standard Tile Adhesive

Ideal for fixing ceramic, vitrified, and porcelain tiles up to 2x2 ft on interior walls and floors.

Features: Enhanced strength, smooth consistency, better coverage.

Recommended For: Medium-size tiles for homes, commercial interiors.

Application: Wall & floor tiles (up to 2x2 ft) - Interior

CATEGORY:
C2TE

Testing Parameters Table

Packaging Size: 20 & 40 kg. Bag

Product Code	Open Time	Pot life	Adjustability Time	Shear Adhesion (28 days)	Slip Resistance	Coverage (Approx.)	Water Resistance	Flexibility
TA-202	20–25 min	4 hrs	20–30 min	≥ 0.8 N/mm ²	≤ 0.5 mm	3.5–4.5 m ² per 20 kg	Good	Medium



TA-303 Premium Tile Adhesive

Engineered for all types of tiles of any size for both wall and floor applications, including vitrified and porcelain tiles.

Features: Polymer-modified, flexible, excellent adhesion & slip resistance.

Recommended For: Residences, commercial interiors, exteriors.

Application: Wall & floor tiles of any size - Interior & Exterior

CATEGORY:
C2TES1

Testing Parameters Table

Packaging Size: 20 & 40 kg. Bag

Product Code	Open Time	Pot life	Adjustability Time	Shear Adhesion (28 days)	Slip Resistance	Coverage (Approx.)	Water Resistance	Flexibility
TA-303	25–30 min	4–5 hrs	25–30 min	≥ 1.0 N/mm ²	≤ 0.3 mm	3–4 m ² per 20 kg	Excellent	High



TA-404 Heavy-Duty Tile Adhesive

High-strength adhesive for marble, granite, and heavy tiles. Designed for critical applications with heavy load.

Features: High tensile bond strength, superior flexibility, weather-resistant.

Recommended For: Large format marble, granite, stone, and tough exterior applications.

Application: Granite, marble, heavy tiles - Interior & Exterior

CATEGORY:
C2TES2

Testing Parameters Table

Packaging Size: 20 & 40 kg. Bag

Product Code	Open Time	Pot life	Adjustability Time	Shear Adhesion (28 days)	Slip Resistance	Coverage (Approx.)	Water Resistance	Flexibility
TA-404	30-35 min	5 hrs	30-35 min	≥ 1.5 N/mm²	≤ 0.2 mm	2.5-3.5 m² per 20 kg	Excellent	Very High



BLOC-40 Block Joint Mortar

Pre-mixed, high-bond strength block joint mortar for all sizes of AAC, CLC, and fly ash blocks. Ensures reduced shrinkage, better workability, and crack resistance.

Features: Ready-to-use, easy application, high adhesive strength.

Recommended For: All block jointing in modern construction.

Application: AAC, CLC, Fly Ash blocks of all sizes

Testing Parameters Table

Packaging Size: 40 kg. Bag

Product Code	Open Time	Pot life	Adjustability Time	Shear Adhesion (28 days)	Slip Resistance	Coverage (Approx.)	Water Resistance	Flexibility
BLOCKBOND-40	N/A	1 hrs	N/A	≥ 0.7 N/mm ² (Block shear)	N/A	140-150 blocks/40 kg	High	Moderate

TILE ADHESIVE

NEXBOND™
Build for Tomorrow...



TILE GROUT Cement-Based Tile Grout

Product Description: NEXBOND TILEGROUT-C is a high-quality, polymer-modified cement-based tile grout for filling tile joints up to 4 mm width. It is designed for ceramic, vitrified, porcelain, mosaic, and natural stone tiles. The grout is available in a wide range of attractive, UV-stable colours that match popular tile designs.

Key Features:

- Smooth, non-shrinking formulation
- Easy to mix and apply
- Suitable for walls and floors, internal and external areas

Recommended Use:

- Residential kitchens, bathrooms, and flooring
- Commercial buildings, showrooms, malls

Coverage:

Approx. 50–60 sq. ft. for 2 mm joint per 1 kg depending on tile size and joint width

Shades Available:

Grey, White, Ivory, Black, Terracotta, Beige, Chocolate, Light Grey, etc.

Packaging Size: 1 kg. Pouch



WHITE CEMENT

Product Description: NEXBOND WHITECEM-1KG is a premium-grade white cement used for multipurpose interior and exterior applications. It offers a smooth, bright finish ideal for grouting, wall repairs, artistic finishing, and tile setting.

Key Features:

- Pure white finish with high brightness
- Quick setting and strong bonding
- Ideal for grouting and finishing work
- Can be mixed with pigments for colored finishes

Applications:

- Filling tile joints and cracks
- Minor surface repairs and patching
- White base for color applications



Coverage:

Approx. 40-50 sq. ft. per 1 kg (depends on thickness and surface type)

Shelf Life:

6 months from manufacturing if stored in dry, moisture-free condition

Storage:

- Keep sealed in original packaging
- Store in dry and cool area
- Avoid exposure to air and humidity

Packaging Size: 1 kg. Pouch



EPOXY TILE GROUTS

EPOXYGROUT-R: Regular Epoxy Tile Grout

EPOXYGROUT-G: Glitter/Sparkle Epoxy Tile Grout

Product Description: NEXBOND EPOXYGROUT-R is a high-performance, 3-component epoxy tile grout ideal for stain-resistant, waterproof, and chemical-resistant applications in both residential and industrial spaces. Available in over 45 elegant shades as per our shade card.

Key Features:

- High chemical resistance and stain-proof
- Water impermeable and hygienic
- Smooth, durable, and easy to clean

Applications:

- Ceramic, vitrified, glass mosaic, and stone tiles
- Food processing areas, malls, industrial kitchens
- Wet areas, commercial toilets, luxury residences

Pack Size : 1 kg ₹ 1100/-

Resin	200 gm.
Hardner	100 gm.
Filler	700 gm.
Total Net Content	1 Kg.

Pack Size : 5 kg ₹ 3050/-

Resin	1000 gm.
Hardner	500 gm.
Filler	3.500 kg.
Total Net Content	5 Kg.

NEXBOND DAMPROOF

Product Description: NEXBOND DAMPROOF is an elastomeric acrylic waterproofing coating designed to resist water penetration on horizontal and vertical concrete surfaces. It forms a seamless, flexible, and long-lasting film that bridges cracks and protects structures from rain, UV, and weather impact.

Key Features:

- Excellent crack-bridging capability (up to 1mm)
- UV resistant & thermal reflective
- Excellent adhesion on cementitious surfaces
- Breathable coating with long-term durability

Applications:

- RCC roofs and parapets
- Cement plastered walls
- External wall waterproofing
- Bathrooms, balconies, podiums

Coverage:

2 coats: 2.0–2.5 m² per litre (depending on surface)

Shelf Life & Storage:

- Shelf life: 18 months in sealed condition
- Store in a dry, cool place away from sunlight

Packaging Size: 1L / 5L / 10L / 20L

NEXBOND PU TILEFIX

Product Description: NEXBOND PU TILEFIX is a premium-grade 2-component polyurethane-based adhesive system specially designed for the permanent fixing of natural stone, marble, granite, tiles, and panels on various surfaces such as concrete, metal, wood, and glass. Suitable for interior and exterior applications.

Key Features:

- Exceptional adhesion to any surface (even smooth or non-porous)
- Excellent flexibility and resistance to vibration
- 100% waterproof and heat-resistant
- Long open time and easy application

Applications:

- Natural stone, vitrified, ceramic & glass tiles
- Metal, wood, concrete, plastic & composite panels
- Vertical & horizontal applications (floor & wall)

Coverage:

- 1 kg covers 2 to 3 sq. ft. depending on surface and thickness

Shelf Life & Storage:

- Shelf Life: 12 months (in sealed condition)
- Store in a cool, dry place between 5°C to 35°C
- Keep away from direct sunlight & moisture

Packaging Size: 500g / 1kg / 5kg



NEXBOND LW PLUS

Product Description: NEXBOND LW PLUS is a high-performance liquid waterproofing additive specially designed for cement concrete, mortar, and plaster. It improves the cohesive strength, reduces permeability, and increases resistance to water penetration in construction applications.

Key Features:

- Integral waterproofing action
- Minimizes shrinkage and hairline cracks
- Improves durability and bonding
- Reduces efflorescence

Applications:

- Roof slabs and screeds
- Internal and external plaster
- Basement walls
- Water tanks & sunken portions
- Cement sand mortars and concrete

Coverage:

- 1 litre covers approx. 100 sq.ft. in plaster depending on mix and surface.

Shelf Life & Storage:

- 18 months in sealed condition
- Store in cool, dry place away from sunlight and moisture

Packaging Size: 500ml / 1L / 10L / 20L



SBR LATEX

Product Description: SBR LATEX is a high-performance SBR latex additive used for waterproofing, concrete repair, bonding old to new concrete, and improving the flexural strength of mortars and screeds.

Key Features:

- Improves adhesion and bonding
- Enhances water resistance
- Prevents cracking and shrinkage
- Increases durability of plaster and concrete
- Easy to mix and apply

Applications:

- Roof Slabs • Bathrooms • Water Tanks • External Walls
- Plaster Repair

Coverage:

- Approx. 25-30 sq.ft per litre as a bond coat (may vary with surface)

Shelf Life & Storage:

- Store in a cool, dry place. Shelf life: 12 months in unopened pack.

Packaging Size: 500ml / 1L / 5L / 20L

RESIN HARDENER

NEXBOND™
Build for Tomorrow...



Packaging Size: 180gm. & 90gm.



RESIN HARDENER

Super strong bond: With stands heavy loads and extreme conditions.

Waterproof & Chemical Resistant: Perfect for tough environments.

Multipurpose Use: Ideal for industrial, construction, and household applications.

Heat & Impact Resistant: Ensures long-lasting durability.

Easy mixing & Application: Smooth consistency for hassle-free use.

How to Use:

1. **Surface Preparation:** Clean and dry the surfaces before application.
2. **Mixing:** Take 2 part of Resin & 1 part Hardener by weight & mix thoroughly until uniform.
3. **Application:** Apply the mixture on the surface and join immediately.
4. **Curing Time:** Initial setting in 30-60 minutes, full strength in 24 hours.



FILLER POWDER

Nexbond block fix is a versatile thin jointing a polymer fiber integrated grey cement composition based adhesive for fixing blocks & bricks fix on it comes in a premixed, ready to use & specially designed to provide stronger, durable bonding between the blocks with optimum adhesive strength.

Suitable for

It is recommended masonry wall preparation by jointing all type of AAC blocks, fly ash bricks.


Technical specification

Packaging Size: 730 gm. Bag

Parameters	Appearance	Pot life	Water Ratio	Tensile Adhesion (28 days)	Shear Adhesion (28 days)	Coverage (40 kg bag)	Block size in mm
Specifications	Grey powder	>60 mins.	25% By Weight of Powder	0.80 N/mm ²	0.75 N/mm ²	210-230 Sq. Ft.	600x200x75



CPVC CEMENT

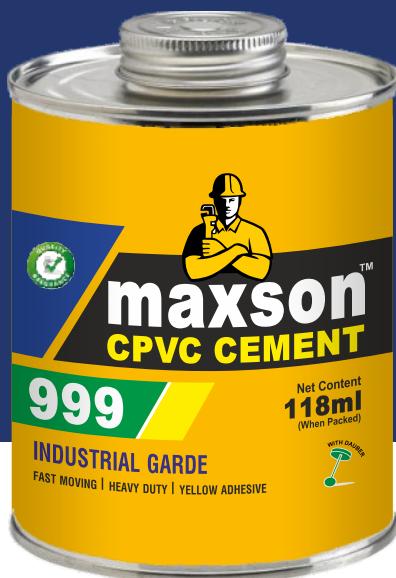

PRODUCT DETAILS:

Brand	NEXBOND
Surface of Application	Plastic
Form	Liquid
Specific Gravity	0.900 - 0.900 gm/cm ³
Boiling Point	85 Degree C
Odour	Strong
Grade Standard	Chemical Grade
Curing Time	35 Minutes
Pipe Joining Time	2.0 Minutes
Solid Content	Min. 12% by mass

SIZE	10 ml	25 ml	50 ml	118 ml	237 ml	500 ml	1 Ltr.
INNER PACKING	50 (Tube)	50 (Tube)	50 (Tin)	24 (Tin)	16 (Tin)	12 (Tin)	6 (Tin)
MASTER PACKING	1250	800	400	288	128	48	24




UPVC CEMENT

PRODUCT DETAILS:

Brand	NEXBOND
Surface of Application	Plastic
Form	Liquid
Specific Gravity	0.900 - 0.900 gm/cm ³
Boiling Point	85 Degree C
Odour	Strong
Grade Standard	Chemical Grade
Curing Time	35 Minutes
Pipe Joining Time	2.0 Minutes
Solid Content	Min. 12% by mass

SIZE	10 ml	25 ml	50 ml	118 ml	237 ml	500 ml	1 Ltr.
INNER PACKING	50 (Tube)	50 (Tube)	50 (Tin)	24 (Tin)	16 (Tin)	12 (Tin)	6 (Tin)
MASTER PACKING	1250	800	400	288	128	48	24

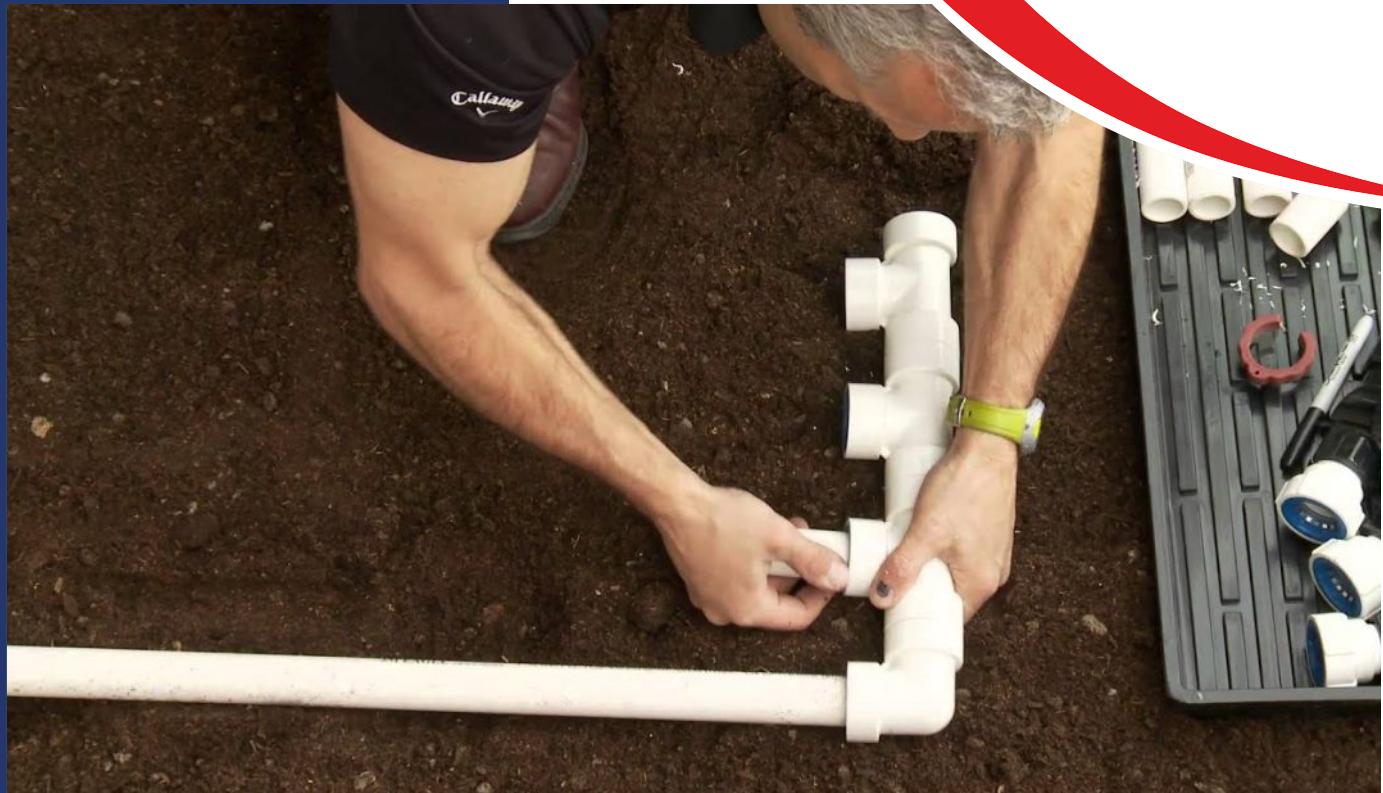

PVC CEMENT



PRODUCT DETAILS:

Brand	NEXBOND
Packaging Type	Tube, Can
Form	Transparent Liquid
Surface of Application	Plastic
Specific Gravity	0.850 - 0.900 gm/cm ³
Odour	Strong
Curing Time	35 Minutes
Pipe Joining Time	2 Minutes
Solid Content	10% by mass
Used for	joining of ISI PVC pipes and PVC fittings

SIZE	10 ml	25 ml	50 ml	118 ml	237 ml	500 ml	1 Ltr.
INNER PACKING	50 (Tube)	50 (Tube)	50 (Tin)	24 (Tin)	16 (Tin)	12 (Tin)	6 (Tin)
MASTER PACKING	1250	800	400	288	128	48	24

CONTACT WITH US



- 606, Rudram Icon, Opp. Shayona Arcade,
Opp. Silver Oak Collage, Ahmedabad, Gujarat - 382481**
- support@nextbond.co.in**
- 85111 81866**



Follow us

- solvoweld_adhesive**
- Solvo Weld adhesive India Pvt.Ltd**
- Solvo Weld adhesive (India) Pvt.Ltd**
- @solvoweldadhesives**